


NMC-RP24UE2-1U-BK

NIKOMAX 19", 1U, 24 , .6 ( E), 250 , RJ45/8P8C, 110/KRONE, T568A/B, -

( - ) -

NIKOMAX NMC-RP24UE2-1U-BK

19"

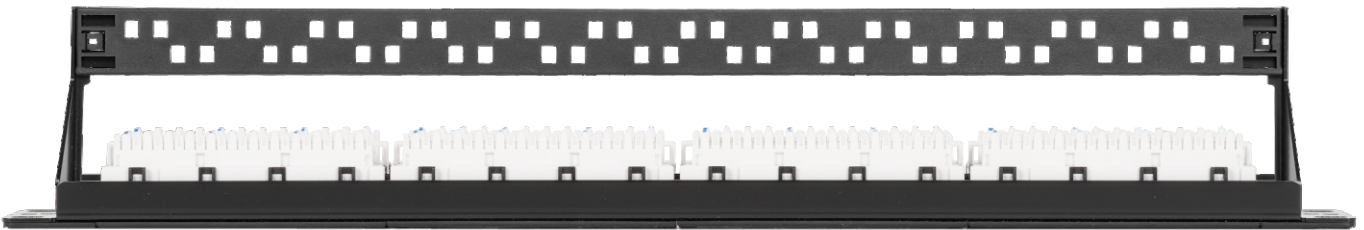

1 .  
1 .  
24 .  
4 .  
1 .

10BASE-T, 100BASE-TX, 100BASE-T4, 1000BASE-T, 2.5GBASE-T, 5GBASE-T, ATM-25, ATM-51, ATM-155, 100VG-AnyLan, TR-4, TR-16Active, TR-16Passive

ISO/IEC11801, EN 50173 TIA/EIA-568

	6
	250
	24
	1U
	RJ45/8P8C
	-24-22 AWG (0,50-0,65 )
IDC ( )	110/KRONE
	T568A/B
	750-
	,
	19"


	1,5
	(50 ) (100 )
IDC	
IDC	(100 )
	, , UL94V-0

	1 - 250
	1000 , 60 1
	20
IDC	2,5
(NVP)	2,5
(500 )	500 M *

	30
	80
	-40 +70 °C
	0 +50 °C
	-10 +60 °C

	5
	25

	505 80 55
	0,723
	0,002222 <sup>3</sup>

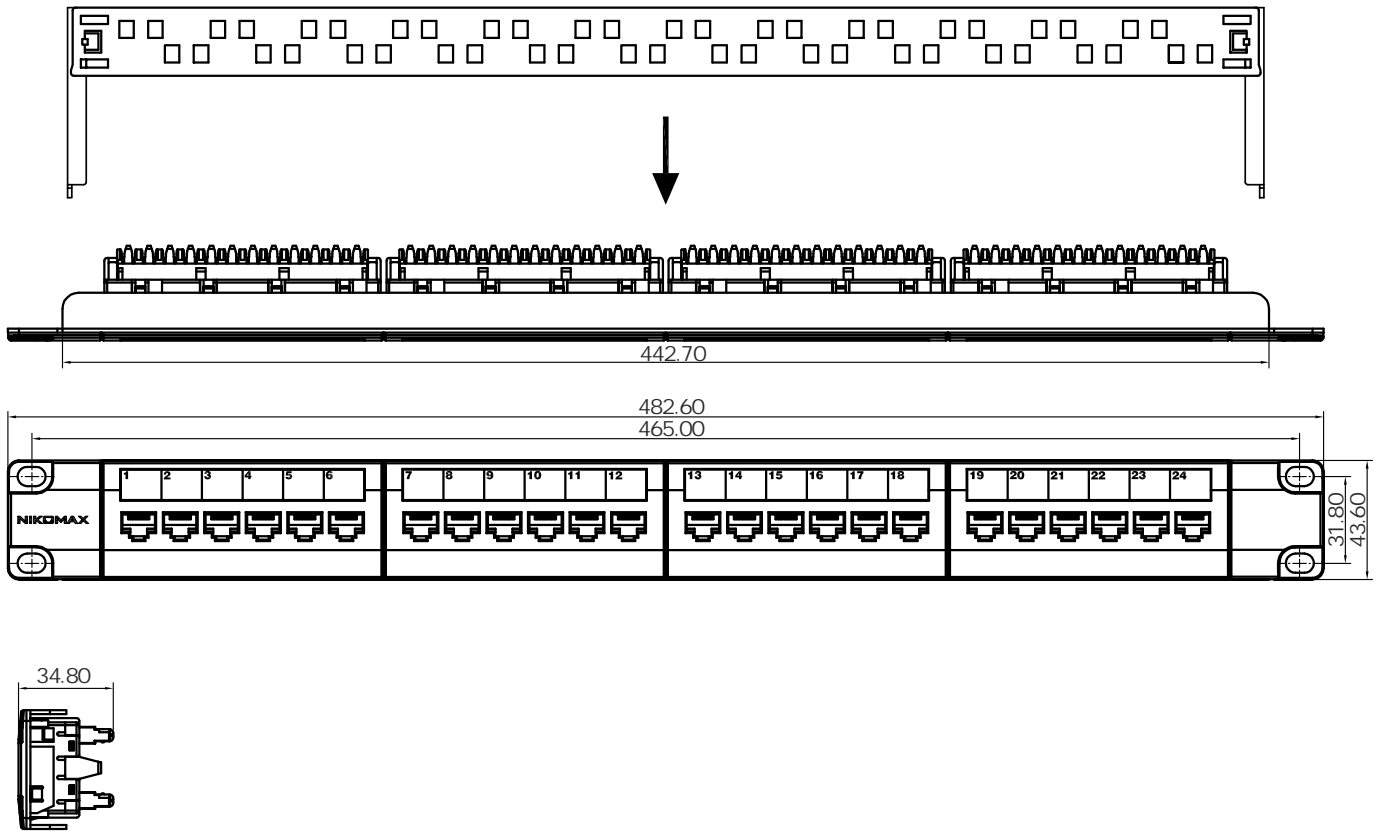

40 +70°C.

- 1.
- 2.
- 3.
- 4.
- 5.

( )