

EC-PC4UD55B-BC-LSZH-XXX-GY-10

NETLAN U/UTP

4, 0.5e (D), 100
2 RJ45/8P8C, T568B,

10
()




EC-PC4UD55B-BC-PVC-xxx-zz-10

5,

T568B.

RJ45/8P8C.

NETLAN

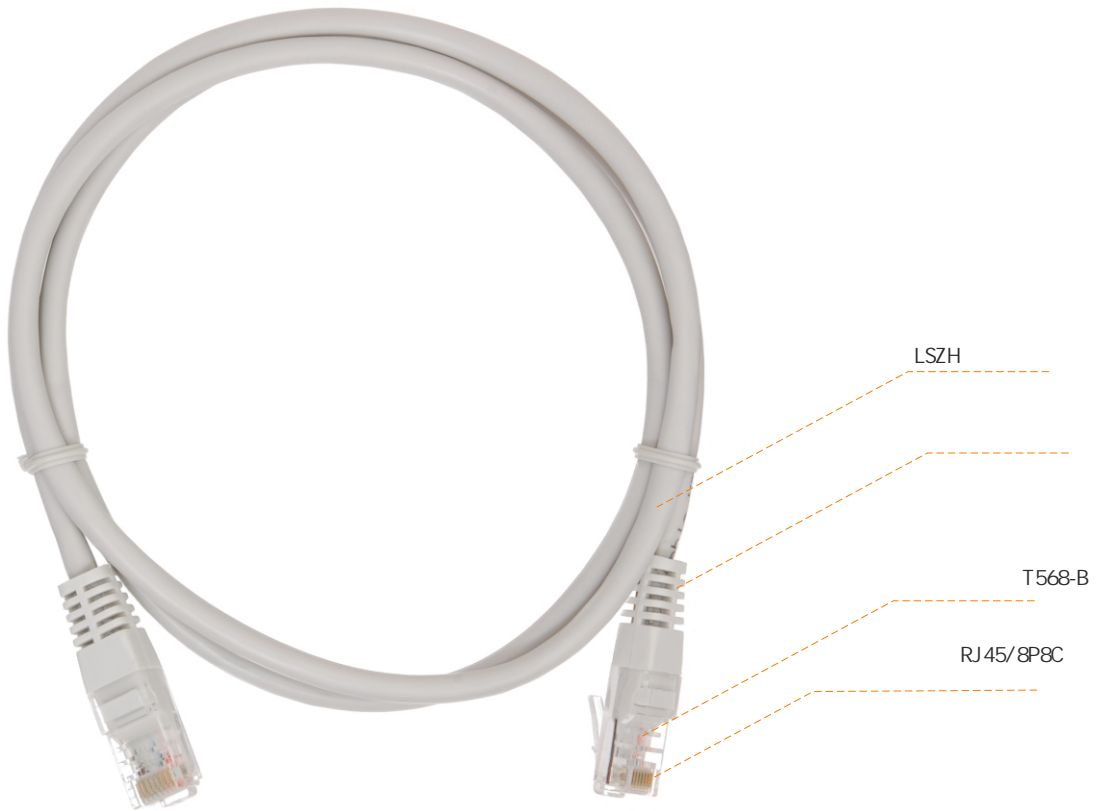

EC-PC4UD55B-BC-LSZH-XXX-GY-10

XXX — (005 — 0,5 , 010 — 1 , ...)

	EC-PC4UD55B-BC-LSZH-XXX-GY-10
	5e
	100
	UTP
	4
	26 AWG (7 0,160 ± 0,1)
	2xRJ45/8P8C
	3
	T568B
	(PE)
	LSZH
	5,2 ± 0,3
	: ISO/IEC 11801, EN 50173 TIA/EIA-568
	10BASE-T, 100BASE-TX, 100BASE-T4, 100BASE-T, ATM-25, ATM-51, ATM-155, 100VG-AnyLan, TR-4, TR-16 Active, TR-16 Passive
	- -20 +60 - -20 +50
	1
	10

EC-PC4UD55B-BC-LSZH-003-GY-10	5e		0,3	10	0,0015	0,10
EC-PC4UD55B-BC-LSZH-005-GY-10	5e		0,5	10	0,0018	0,13
EC-PC4UD55B-BC-LSZH-010-GY-10	5e		1	10	0,0023	0,22
EC-PC4UD55B-BC-LSZH-015-GY-10	5e		1,5	10	0,0025	0,30
EC-PC4UD55B-BC-LSZH-020-GY-10	5e		2	10	0,0030	0,45
EC-PC4UD55B-BC-LSZH-030-GY-10	5e		3	10	0,0038	0,70
EC-PC4UD55B-BC-LSZH-050-GY-10	5e		5	10	0,0057	1,00
EC-PC4UD55B-BC-LSZH-100-GY-5	5e		10	5	0,0090	1,98